

**LUME**<sup>TM</sup>

Manufactured By Transpower  
right quality right price

## environmentally friendly lighting products



### **SAFETY**

LOW TEMPERATURE, NO MERCURY POLLUTION & NO BREAKS

### **ENERGY SAVING**

1 / 10 OF CONSUMING POWER THAN AN INCANDESCENT BULB

### **LONG LIFETIME**

10 TIMES PRODUCT LIFETIME THAT AN INCANDESCENT BULB


### **LESS MAINTENANCE**

CHANGE THE LIGHT EVERY 5 YEARS




# LED PANEL LIGHT

(Square / Round Concealed Type)

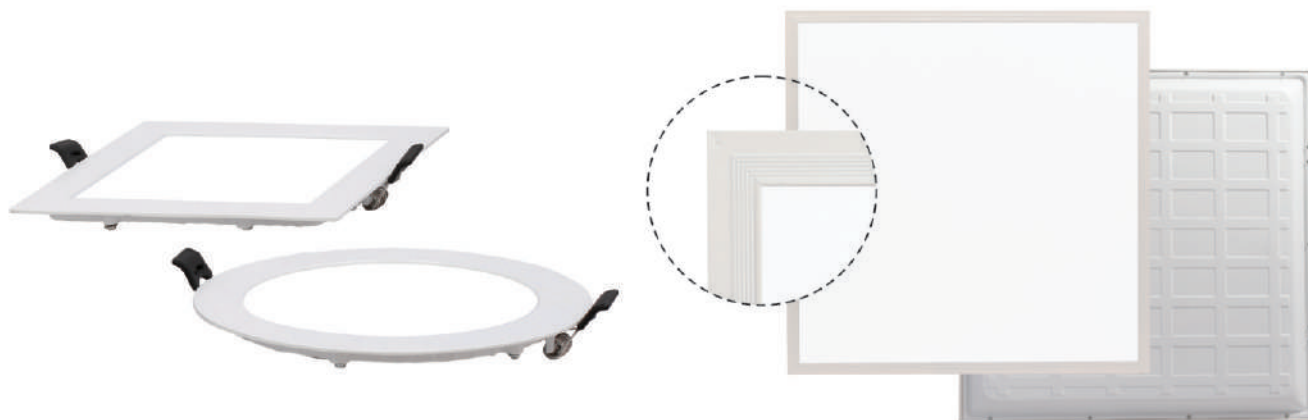

Code	Wattage (W)	PCB Size (mm) Length X Width & PCB		Outer Size (mm)	Cut Out Size (mm)
V - 101	4 W	R0-175 X 6	SQ-212 X 6	82 X 82	70 X 70
V - 102	6W	R0-235 X 6	SQ-291 X 6	110 X 110	95 X 95
V - 103	9W	R0-278 X 6	SQ-331 X 6	120 X 120	100 X 100
V - 104	12 W	R0-376 X 6	SQ-465 X 6	150 X 150	138 X 138
V - 105	15 W	R0-438 X 6	SQ 527 X 6	172 X 172	150 X 150
V - 106	18W	R0-490 X 6	SQ-610 X 6	190 X 190	175 X 175
V - 107	22 W	R0 592 X 6	SQ 726 X 6	220 X 220	200 X 200
V - 108	24 / 30 W	SQ. 263 X 8mm X 4		300 X 300 (1 X 1)	285 X 285
V - 109	40/50 W	SQ. 557 X 6mm X 2		595 X 595 (2 X 2)	575 X 575

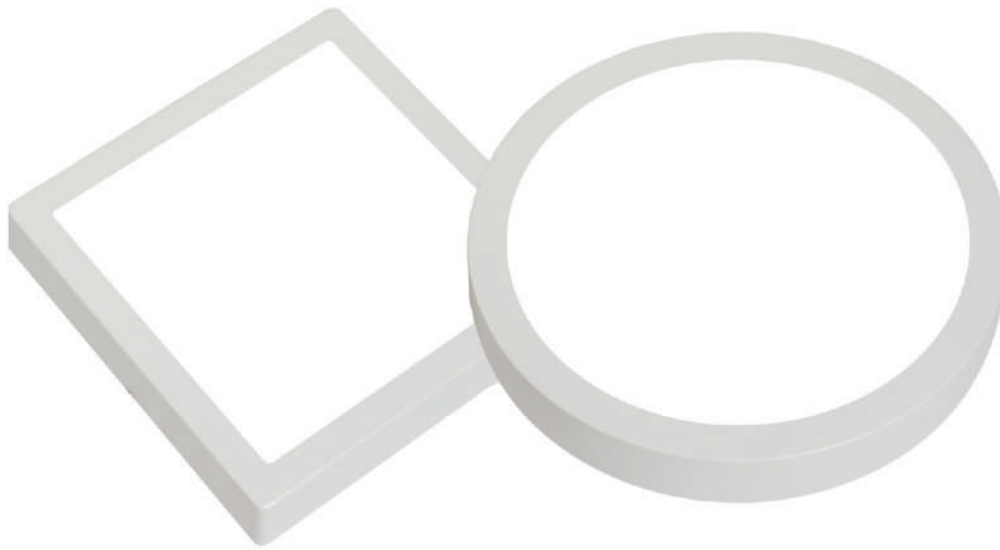

Code	Wattage (W)	PCB Size (mm) Length X Width & PCB	Outer Size (mm)	Height (mm)
V - 110	4 W	R0-172 X 6 SQ-65 X 6 X 4	80 X 80	35 mm
V - 111	9 W	R0-278 X 6 SQ-331 X 6	100 X 100	32 mm
V - 112	12 W	R0-376 X 6 SQ-465 X 6	135 X 135	32 mm
V - 113	15 W	R0-438 X 6 SQ-545 X 6	155 X 155	32 mm
V - 114	22 W	R0-560 X 6 SQ-698 X 6	195 X 195	32 mm
V - 115	30 W	263 X 8mm X 4	300 X 300(1 X 1)	45 mm




**LED PANEL LIGHT**  
(Rectangle Concealed Type)



V - 116

V - 117



V - 118

V - 119



V - 120

V - 121

Code	Wattage (W)	PCB Size (mm) Length X Width & PCB	Outer Size (mm)	Cut Out Size (mm)
V - 116	1/11 12 W	675 X 6MM X 2	295 X 100	285 X 95
V - 117	2/11 22 W	805 X 6mm X 2	300 X 175	285 X 160
V - 118	1/36 30 W	474 X 8mm X 2	510 X 150	495 X 137
V - 119	2/36 36 W	474 X 8mm X 2	533 X 228	505 X 218
V - 120	1/40 36/40 W	580 X 6mm X 4	1200 X 165 47.255" X 6.5"	1175 X 135 46.25" X 5.3"
V - 121	2/40 40/50 W	580 X 6mm X 4	1200 X 300 47.25" X 11.8"	1175 X 275 46.25" X 10.8"

## COB SPOT LIGHT

Flat Model (Ro. / Sq. Movable Type)



Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 122	4 W	Round / Square	68 X 68	58 X 58	35
V - 123	7 W	Round / Square	88 X 88	70 X 70	40
V - 124	12 W / 15 W	Round / Square	105 X 105	85 X 85	55

## COB SPOT LIGHT Flat Model (Ro. Movable Type)



Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 125	15 W / 20W / 25W	Round	120 X 120	105 X 105	75
V - 126	30 W / 36W	Round	145 X 145	135 X 135	90
V - 127	40 W / 50W	Round	160 X 160	145 X 145	100

## VERO COB SPOT LIGHT Deep Model (Ro. Fix Type)

**Led Make** : Cree / Bridgelux  
**Driver** : Philips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Heatsink Colour** : Grey / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo



Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 128	25 W	Round	140 X 140	120 X 120	90
V - 129	30 W	Round	165 X 165	145 X 145	110
V - 130	50 W	Round	200 X 200	175 X 175	110

## DELTA COB SPOT LIGHT (Round Concealed Type)

**Led Make** : Cree / Bridgelux  
**Driver** : Philips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Heatsink Colour** : Grey / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo



Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 131	4 W	Round	70 X 70	60 X 60	65
V - 132	7 W	Round	75 X 75	65 X 65	70
V - 133	12 W	Round	83 X 83	76 X 76	75
V - 134	18 W	Round	95 X 95	85 X 85	85
V - 135	30 W	Round	128 X 128	115 X 115	115

## CURVE COB SPOT LIGHT (Round Concealed Type)



Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 136	4 W	Round	70 X 70	60 X 60	65
V - 137	7 W	Round	75 X 75	65 X 65	70
V - 138	12 W	Round	83 X 83	76 X 76	75
V - 139	18 W	Round	95 X 95	85 X 85	85
V - 140	30 W	Round	128 X 128	115 X 115	115



**Led Make** : Cree / Bridgelux  
**Driver** : Phillips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Heatsink Colour** : Grey / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo



V - 141

V - 142

Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 141	15 W	Round	90 X 90	80 X 80	100
V - 142	15 W	Round	83 X 83	76 X 76	100

**Led Make** : Cree / Bridgelux  
**Driver** : Phillips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Heatsink Colour** : Grey / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo  
**Reflector Colour** : Silver Chrome / Rose Gold / Copper Chrome





Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 143	7 W	Round	75 X 75	65 X 65	70
V - 144	12 W	Round	83 X 83	76 X 76	75
V - 145	18 W	Round	95 X 95	85 X 85	85

# COB SPOT LIGHTS

## SURFACE CYLINDER & HANGING LIGHT

**Led Make** : Cree / Bridgelux  
**Driver** : Phillips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Heatsink Colour** : Grey / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo

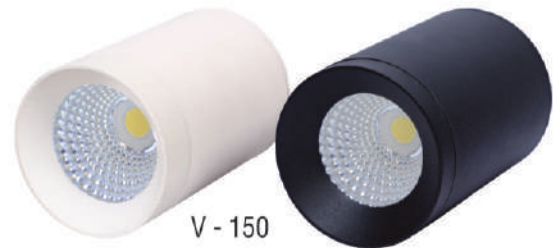

Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 146	1 W	LED Button Round	35 X 35	28 X 28	20
V - 147	3 W	LED Button Round & Square	40 X 40	34 X 34	25
V - 148	3 W	LED Surface Round & Square	65 X 65	65 X 65	30
V - 149	10/15 W	LED Cylinder Ceiling	75 X 150	—	150
V - 150	20/25 W	LED Cylinder Ceiling	100 X 150	—	150
V - 151	30/36 W	LED Cylinder Ceiling	100 X 200	—	200





V - 152



V - 157



V - 158

**Led Make** : Cree / Bridgelux  
**Driver** : Philips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Heatsink Colour** : Grey / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo  
**Zoom Rotation** : 360 Degree



V - 153



V - 154



V - 155



V - 156

Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 152	30 / 50 W	zoom Rectngle (4 X 6")	145 X 235	135 X 220	100
V - 153	10 / 15 W	COB Zoom Round	110 X 110	95 X 95	55
V - 154	20 / 25 W	COB Zoom Round	130 X 130	120 X 120	75
V - 155	30 / 36 W	COB Zoom Round	160 X 160	140 X 140	100
V - 156	30 / 50 W	COB Zoom Round	190 X 190	180 X 180	135
V - 157	25 / 30 W	COB Zoom Square	145 X 145	115 X 115	130
V - 158	30 / 50 W	COB Zoom Square	170 X 170	130 X 130	130

# COB SPOT LIGHTS

**Led Make** : Cree / Bridgelux  
**Driver** : Philips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Heatsink Colour** : Grey / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo




Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)
V - 159	10 W	MR - 16 Triyo	50 X 50	50 X 50	55
V - 160	15 W	MR - 16 Triyo	50 X 50	50 X 50	85
V - 161	4 W	Junction Fitting	80 X 80	55 X 55	40
V - 162	7 W	Junction Fitting	110 X 110	80 X 80	40
V - 163	7 W	LED Spaik	75 X 55	75 X 55	90
V - 164	12 W	LED Spaik	75 X 55	75 X 55	110
V - 165	4 W	LED Foot Light	95 X 70	95 X 70	45
V - 166	8 W	LED Foot Light	150 X 70	150 X 70	45

**Syska Model**  
(Poly Carbonet Body)  
Down Light  
Inside Driver System



Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)	PCB Size (mm)
V - 167	8 W	Round & Square	105 X 105	95 X 95	25	RO. 78 / SQ. 78 X 78
V - 168	12 W	Round & Square	150 X 150	135 X 135	25	RO.120 / SQ. 120 X 120
V - 169	18 W	Round & Square	170 X 170	150 X 150	25	RO.136 / SQ. 135 X 135
V - 170	22 W	Round & Square	200 X 200	185 X 185	25	RO. 170 / SQ. 170 X 170

**GM Model**  
(Poly Carbonet Body)  
Edge Light  
Inside Driver System

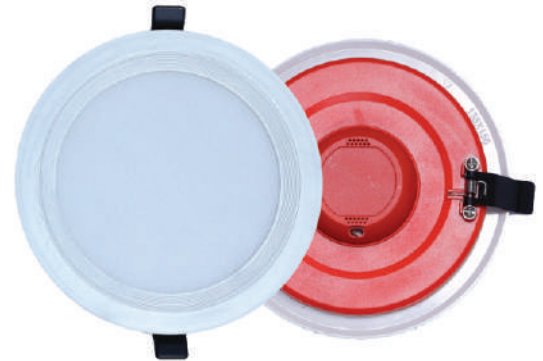


Code	Wattage (W)	PCB Size (mm) Length X Width & PCB	Outer Size (mm)	Cut Out Size (mm)
V - 171	4 W	RO-175 X 6 SQ-212 X 6	82 X 82	70 X 70
V - 172	9W	RO-278 X 6 SQ-331 X 6	120 X 120	100 X 100
V - 173	12 W	RO-376 X 6 SQ-465 X 6	150 X 150	138 X 138
V - 174	15 W	RO-438 X 6 SQ-545 X 6	175 X 175	150 X 150
V - 175	22 W	RO-560 X 6 SQ-698 X 6	220 X 220	200 X 200



## LED DOWN LIGHT

( Round / Square Concealed Type  
Flat Model )


### Flat Model (Casting Body)

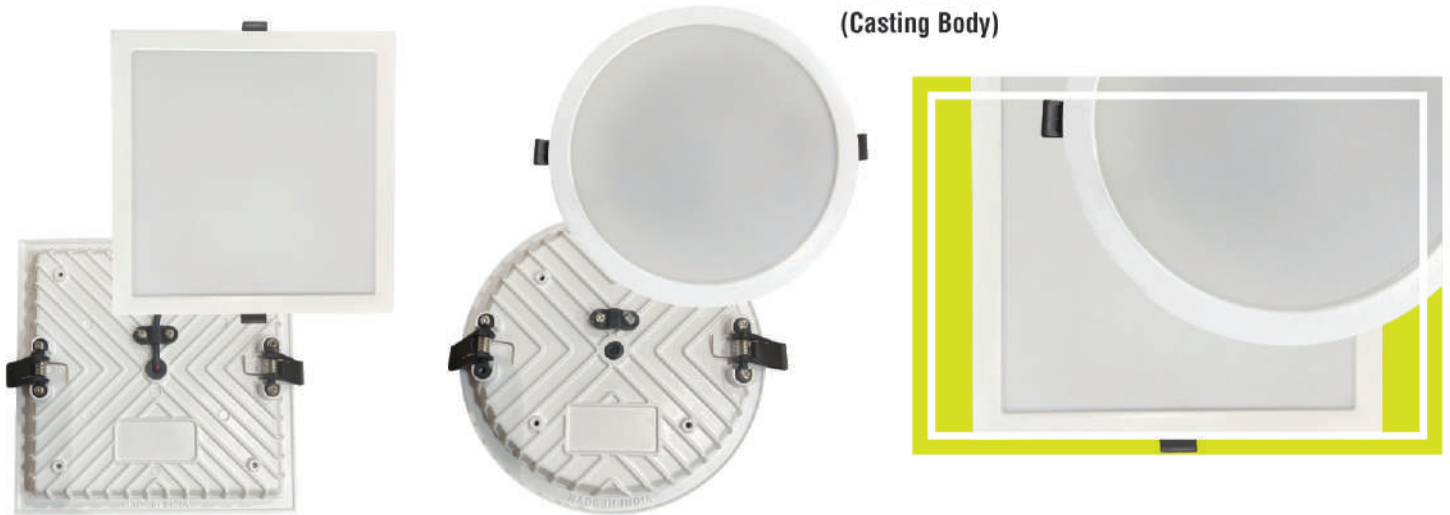

Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)	PCB Size (mm)
V - 176	8 W	Round / Square	120 X 120	100 X 100	35 mm	RO. 83 / SQ. 84 X 84
V - 177	12 W	Round / Square	145 X 145	125 X 125	35 mm	RO. 106 / SQ. 106 X 106
V - 178	18 W	Round / Square	170 X 170	150 X 150	35 mm	RO. 130 / SQ. 130 X 130
V - 179	24 W	Round / Square	195 X 195	175 X 175	35 mm	RO. 156 / SQ. 156 X 156



### DOWN LIGHT (RIMLESS) Deep Down Light

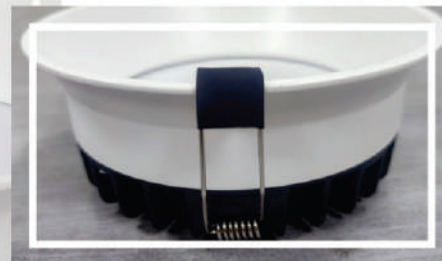

#### Spring Type

Code	Wattage (W)	Design	Outer Size (mm)	Cut Out Size (mm)	Height (mm)	PCB Size (mm)
V - 180	8 - 12 W	Round	119 X 119	112 X 112	53	73
	8 - 12 W	Square	110 X 110	100 X 100	53	63 X 63
V - 181	18 W	Round	154 X 154	125 X 125	58	98
	18 W	Square	145 X 145	120 X 120	58	93 X 93
V - 182	24 W	Round	175 X 175	150 X 150	58	130
	24 W	Square	170 X 170	140 X 140	58	110 X 110







# LED STREET LIGHTS (Glass Model)



Code	Wattage (W)	PCB Size (mm)	Driver Area Dimension ( Length x Width x Height )	Pipe Size
V - 183	15 W Eco Series	55 X 100	58 X 45 X 30 mm	38mm
V - 184	15 / 18 / 24 W	70 X 135	80 X 70 X 30 mm	38mm
V - 185	24 / 30 / 36 W	82 X 157	95 X 75 X 40 mm	45mm
V - 186	30 / 36 / 50 W	110 X 190	100 X 80 X 40 mm	45mm
V - 187	50 / 60 / 72 W	120 X 184	120 X 85 X 48 mm	48mm
V - 188	72 / 100 W	140 X 200	135 X 85 X 50 mm	48mm
V - 189	100 / 150 W	160 X 220	160 X 90 X 50 mm	48mm
V - 190	150 / 200 W	213 X 270	210 X 120 X 55 mm	58mm
V - 191	250 / 300 W	265 X 300	250 X 150 X 75 mm	80mm
V - 192	300 / 400 W	250 X 390	225 X 150 X 58 mm	80mm





Code	Wattage (W)	PCB Size (mm)	Driver Area Dimension ( Length x Width x Height )	Pipe Size
V - 193	24 W	70 X 135	80 X 70 X 30 mm	38mm
V - 194	36 W	82 X 157	95 X 75 X 40 mm	45mm
V - 195	50 W	110 X 190	100 X 80 X 40 mm	45mm
V - 196	50 / 72 W	120 X 184	120 X 85 X 48 mm	48mm
V - 197	100 W	140 X 200	135 X 85 X 50 mm	48mm
V - 198	150 W	160 X 220	160 X 90 X 50 mm	48mm
V - 199	200 W	213 X 270	210 X 120 X 55 mm	58mm

## SUPER LENS LED STREET LIGHTS



V - 202

V - 201

V - 200

## MINI LENS LED STREET LIGHTS



V - 203

V - 204

Code	Wattage (W)	PCB Size (mm)	Driver Area Dimension (Length x Width x Height)	Pipe Size
V - 200	24 W	60 X 108	40 X 85 X 30	40 mm
V - 201	36 W	85 X 140	45 X 100 X 30	45 mm
V - 202	50 W	105 X 160	60 X 125 X 30	45 mm
V - 203	30 W	60 X 108	45 X 80 X 40	40 mm
V - 204	50 W	85 X 140	70 X 105 X 40	45 mm

## ECO LENS LED STREET LIGHTS



V - 205  
V - 206

V - 207

V - 208  
V - 209

V - 210

V - 211

Code	Wattage (W)	PCB Size (mm)	Driver Area Dimension (Length x Width x Height)	Pipe Size
V - 205	18 W	65 X 110	45 X 80 X 40	40 mm
V - 206	24 W	65 X 110	45 X 80 X 40	40 mm
V - 207	36 W	85 X 142	70 X 105 X 40	45 mm
V - 208	50 W	112 X 160	90 X 140 X 40	45 mm
V - 209	72 W	112 X 160	90 X 140 X 40	45 mm
V - 210	100 W	148 X 192	110 X 170 X 60	65 mm
V - 211	150 W	154 X 264	110 X 170 X 60	70 mm



V - 212



V - 213



V - 216



V - 214



V - 215

Code	Wattage (W)	PCB Size (mm) PUNCHING SIZE	Driver Area Dimension ( Length x Width x Height )	Pipe Size
V - 212	24 W	85 X 95	105 X 55 X 35	38 mm
V - 213	32 W	100 X 118	105 X 80 X 50	45 mm
V - 214	50 W	116 X 154	125 X 80 X 50	45 mm
V - 215	72 W	145 X 170	150 X 90 X 50	45 mm
V - 216	100 / 150 W	200 X 215	200 X 120 X 68	45 mm



# BACK CHOKE FLOOD LIGHT

Aluminium casting with water proof  
(Heavy Duty) IP - 65



V - 217



V - 218



V - 219



V - 220



V - 221



V - 222



V - 223



BACK

Code	Wattage (W)	PCB Size (mm)	Fixture Size (mm) (Length X Width X Height)	Driver Area Dimension (Length X Width X Height)
V - 217	15 W / 20 W	60 X 70	130 X 100 X 35	75 X 45 X 30
V - 218	30 W / 50 W	93 X 135	210 X 150 X 60	110 X 70 X 40
V - 219	50 W / 60 W	140 X 100	245 X 180 X 65	150 X 90 X 45
V - 220	72 W / 100 W	135 X 185	295 X 240 X 70	150 X 90 X 45
V - 221	100 W / 150 W	155 X 230	345 X 250 X 75	220 X 110 X 45
V - 222	150 W / 200 W	206 X 260	390 X 300 X 80	220 X 110 X 45
V - 223	250 W / 400 W	250 X 390	500 X 340 X 80	225 X 150 X 58
V - 224	500 W / 600 W	250 X 390	500 X 340 X 80	225 X 150 X 58 2G

## DOWN CHOKE FLOOD LIGHTS

Aluminium casting with water proof  
(Heavy Duty) IP - 65

**DOWN CHOKE  
(FLOOD ECO)**



**GM MODEL  
(FLOOD ECO)**



Code	Wattage (W)	PCB Size (mm)	Fixture Size (mm) (Length X Width X Height)	Driver Area Dimension (Length X Width X Height)
V - 225	20 / 30 W	95 X 60	200 X 180 X 60	112 X 45 X 30
V - 226	50 / 60 / 72 W	93 X 135	215 X 205 X 60	130 X 60 X 38
V - 227	100 W	100 X 140	270 X 245 X 70	150 X 80 X 40
V - 228	150 W	135 X 185	305 X 285 X 70	190 X 80 X 40
V - 229	200 W	155 X 230	345 X 325 X 80	235 X 100 X 45
V - 230	250/300 W	206 X 260	415 X 370 X 80	285 X 110 X 45
V - 231	400 W	250 X 390	500 X 465 X 70	410 X 120 X 70
V - 232	50 W Delux	73 X 114	200 X 180 X 60	120 X 60 X 35



## DOWN CHOKE LENS FLOOD LIGHT

Aluminium casting with water proof  
(Heavy Duty) IP - 65



Code	Wattage (W)	PCB Size (mm)	Fixture Size (mm) (Length X Width X Height)	Driver Area Dimension (Length X Width X Height)
V - 233	30 W	95 X 60	200 X 180 X 60	112 X 45 X 30
V - 234	50 W	85 X 190	175 X 220 X 40	45 X 180 X 32
V - 235	100 W	125 X 250	225 X 285 X 40	45 X 250 X 32
V - 236	150 W	135 X 185	305 X 285 X 70	190 X 80 X 40
V - 237	200 W	155 X 230	345 X 325 X 80	235 X 100 X 45

## DOWN CHOKE SUPER DELUX FLOOD LIGHT

Aluminium casting with water proof  
(Heavy Duty) IP - 65



Code	Wattage (W)	PCB Size (mm)	Fixture Size (mm) (Length X Width X Height)	Driver Area Dimension (Length X Width X Height)
V - 238	15 W	35 X 70	120 X 140 X 32	35 X 110 X 22
V - 239	36 W	45 X 125	152 X 178 X 55	30 X 140 X 35
V - 240	50 W	75 X 170	198 X 230 X 55	50 X 195 X 35
V - 241	100 W	85 X 215	245 X 285 X 60	60 X 240 X 40
V - 242	150 W	135 X 260	290 X 355 X 60	60 X 300 X 40
V - 243	200 W	165 X 350	320 X 425 X 60	75 X 370 X 40



V - 244

V - 245

V - 246

V - 247



V - 248

**Available in all Type & Wattege**

- 1) Glass (Flood Type)
- 2) Clear Doom (Well Glass Type)
- 3) Milky Doom (Well Glass Type)
- 4) Aluminium Reflector Type
- 5) Lens Type UFO



BACK

Code	Wattage (W)	PCB Size (mm)	Fixture Size (mm)(Radius) (Length X Width)	Driver Area Dimension (Height X Lenght X Width )
V - 244	30 / 50 W	133 X 133	185 X 50	110 X 70 X 40
V - 245	50 / 72 /100 W	175 X 175	230 X 60	150 X 90 X 45
V - 246	100 / 150 / 200 W	250 X 250	320 X 70	220 X 110 X 45
V - 247	100 / 120 / 150 W	175 X 175	290 X 290 X 100	150 X 150 X 30
V - 248	200 / 250 / 300 W	250 X 250	370 X 85	225 X 150 X 58







Available in colors :

- WH ■ WW ■ NW
- Red ■ Blue ■ Green ■ Pink



Led T-Bulb 10 W  
Move Both 90 Deg. Vertically  
and 35 Deg. Horizontally  
B-22 Base cap.

Code	Wattage (W)	Design	PCB Size (mm)
V - 249	5 W	1 Ft. Tubelight	292.5 X 6
V - 250	10 W	2 Ft. Tubelight	585 X 6
V - 251	20 W	4 Ft. Tubelight	1170 X 6
V - 252	36W	4 Ft. Tubelight ( T - 8 ) Aluminium	1170 X 6
V - 253	10 / 12 W	T - Bulb	190 X 20
V - 254	7 / 9 / 12 W	Led Bulb	40



## LED TRACK LIGHT



V - 255



V - 256



V - 257

**Led Make** : Cree / Bridgelux  
**Driver** : Philips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo

Code	Wattage (W)	CCT (K)	Body Colour
V - 255	10 / 15 W	3000 / 4000 / 6500	Black / White
V - 256	20 / 25 / 30 W	3000 / 4000 / 6500	Black / White
V - 257	40 / 50 W	3000 / 4000 / 6500	Black / White

## LED LINEAR LIGHT

**Led Make** : Cree / Bridgelux  
**Driver** : Philips / Fulham  
**Colour Temp** : 3000 / 4000 / 6500 K  
**Lumens Efficiency** : 130 Lm / W  
**Led Beam Angle** : 24° / 36° / 60°  
**Body Colour** : White / Black  
**Material** : Aluminum Die Casting  
**Reflector** : Shinland / Darkoo



Code	Wattage (W)	Size	CCT (K)	Height X Length X Width mm
V - 258	18 W	2 Fit	3000 / 4000 / 6500	70 X 600 X 50
V - 259	36W	4 Fit	3000 / 4000 / 6500	70 X 1200 X 50
V - 260	72W	6 Fit	3000 / 4000 / 6500	70 X 2400 X 50



V - 261



V - 262

Code	Wattage (W)	Colour	Outer Size(mm)	PCB Dimensions(mm)	Height X Length X Width (mm)
V - 261	10 W	White / Black	6"	150	55 X 150 X 175
V - 262	15 W	White / Black	8"	180	55 X 200 X 200

V - 263



V - 264

**LED BULKHEAD ALFA**  
(Big & slim Black & White Body)



V - 266



V - 265

Code	Wattage (W)	Colour	PCB Dimensions(mm)	Height X Length X Width (mm)
V - 263	10 W	White / Black	133 X 52	50 X 175 X 95
V - 264	10 W	White / Black	133 X 52	65 X 175 X 95
V - 265	6 W	Grey	95 X 50	50 X 125 X 95
V - 266	10 W	Grey	190 X 62	50 X 175 X 95





**LUME**<sup>TM</sup>  
Manufactured By Transpower  
right quality right price

## Our Values:

- Delight Customers
- Deliver on commitments
- Develop People



**MAKE IN INDIA**

Our brand's promise is sense & simplicity. It encapsulates our commitment to delivering products & solutions that are advanced, easy to use & designed to meet the needs of all our users, wherever in the world they may be.

Manufactured By :

**TRANSPOWER SOLUTIONS,**

Office No.4 , Mahavir Apartment , Evershine City , Vasai(E)-401208

Mobil No. +91 7798991182 / 9623060889 | Email : [transpowersolution@gmail.com](mailto:transpowersolution@gmail.com) / [sales@transpowersolution.in](mailto:sales@transpowersolution.in)